


Report on Peat Assessment

Bookaar Solar Farm Meningoort Road, Bookaar

Prepared for Bookaar Renewables Pty Ltd

> Project 87084.00 October 2020

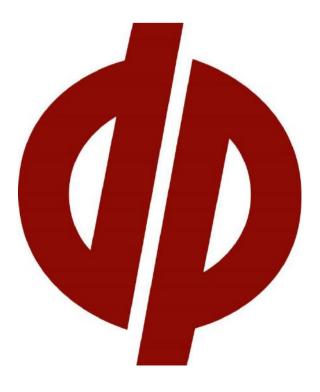

Douglas Partners Geotechnics | Environment | Groundwater

Document History

Document details

Project No.	87084.00	Document No.	R.001.Rev2	
Document title	Report on Peat Asse	Report on Peat Assessment		
	Bookaar Solar Farm			
Site address	Meningoort Road, Bookaar			
Report prepared for	Bookaar Renewables Pty Ltd			
File name	87084.00.R.001.Rev2.docx			

Document status and review

Status	Prepared by	Reviewed by	Date issued	
Revision 0	Arthur Rowling	Fred Verheyde	4 March 2020	
Revision 1	Arthur Rowling	Fred Verheyde	22 June 2020	
Revision 2	Arthur Rowling	Fred Verheyde	15 October 2020	

Distribution of copies

Status	Electronic	Paper	Issued to
Revision 0	1	-	Richard Seymour, Bookaar Renewables Pty Ltd
Revision 1	1	-	Richard Seymour, Bookaar Renewables Pty Ltd
Revision 2	1	-	Richard Seymour, Bookaar Renewables Pty Ltd

The undersigned, on behalf of Douglas Partners Pty Ltd, confirm that this document and all attached drawings, logs and test results have been checked and reviewed for errors, omissions and inaccuracies.

Signature	Date
giginature	Dale
Author Along.	15 October 2020
Reviewer Morry	15 October 2020
pp o s	

bsi, 150 9001 Quality Management FS 604853 Douglas Partners Pty Ltd ABN 75 053 980 117 www.douglaspartners.com.au Unit 3, 131 Shannon Avenue Manifold Heights VIC 3218 Phone (03) 5221 0711



Table of Contents

Page

1.	Introduction	.1
2.	Site Description	.1
3.	Geological Setting	.2
4.	Historical Peat Fires	.3
5.	Field Work Methods	.3
6.	Field Work Results	.4
	6.1 Ground Conditions	4
	6.2 Groundwater	5
7.	Laboratory Testing	.5
8.	Discussion	.6
9.	References	.6
10.	Limitations	.6

Appendix A:	About This Report
Appendix B:	Borehole Location Plan
	Proposed Site Layout Plan
Appendix C:	Borehole Logs
	Soil Sample Photographs
Appendix D:	Laboratory Test Results





Report on Peat Assessment Bookaar Solar Farm Meningoort Road, Bookaar

1. Introduction

This report presents the results of a peat assessment undertaken for the proposed solar farm at Meningoort Road, Bookaar. The investigation was commissioned in an email dated 4 December 2019 by Richard Seymour for Bookaar Renewables Pty Ltd and was undertaken in accordance with Douglas Partners' proposal GGG190054 dated 30 September 2019.

It is understood that the development of the site comprises a 200 MW solar farm with associated ancillary infrastructure including internal access tracks, a substation, battery storage area and operational buildings.

The aim of the investigation was to assess the likelihood of peat being present in the near surface soils at the Site. Peat has been known to cause underground fires in the wider area; therefore, the presence of peat beneath the proposed solar panels could potentially be hazardous.

In order to achieve the aims of the investigation, the following scope of work was undertaken:

- Preparation of Safe Work Method Statements (SWMSs);
- Review of site history and geology records;
- Drilling of six boreholes up to 2.4 m depth.
- Laboratory testing of selected samples;
- Preparation of this report; and
- Completion of all field work, laboratory testing, interpretation and reporting under a quality assurance system.

The details of the field work are presented in this report, together with findings and recommendations on the items listed above.

2. Site Description

The site is located approximately 8 km northwest of Camperdown in Victoria, on paddocks associated with the Meningoort Farm in Bookaar. The paddocks are mainly used for cropping and livestock production.

A site layout and location plan is shown on Drawing 1 in Appendix B. The proposed development plan supplied by the client is also attached.



The heritage listed Meningoort farmhouse is located approximately 1 km west of the proposed solar farm area. The farmhouse is built on the eastern side of Mount Meningoort, an extinct volcano comprising Newer Volcanic Group scoria deposits.

The proposed solar farm area is approximately 588 hectares.

A 220 kV transmission line crosses the site through its approximate centre, in a northeast to southwest direction.

Site levels range from RL 139 m AHD in the south to RL 148 m AHD in the northwest.

At the time of the investigation, extensive desiccation cracks and hummocky ground were noted in the northeast paddock where boreholes BH01 to BH03 were drilled. This paddock is referred to as Lower New by the farm.

The remaining paddocks where boreholes BH04 to BH06 are located were less hummocky than the Lower New paddock, although desiccation cracks were still visible.

Long grasses covered all of the paddocks in the proposed solar farm area, as shown in Figure 1 below.



Figure 1 – Typical long grasses over the site

Based on anecdotal evidence from farm workers obtained during the investigation, no evidence of peat or underground fires has been noted on the site.

3. Geological Setting

The online sources of geological mapping for the site (Geology Web Map Service Maintained by the Victorian Department of Primary Industries - Earth Resource Development Division) is shown on Drawing 1, Appendix B, and indicates that the proposed solar farm site is underlain by three geological units.



The majority of the site is underlain by Tertiary Hanson Plains Sands (referred to as Nb), also known as Brighton Group formation. These are indicated to comprise gravel, sand, silt: variably calcareous to ferruginous sandstones and coquinas; marine to non-marine.

Quaternary Newer Volcanic Group stony rises basalt (Neo2), tholeiitic to alkalic basalt and basanite are indicated along the western edge of the site, comprising youngest flows with little weathering or soil development (stony rises and hummocky lava flows).

Quaternary lake deposits (Ql2) comprising carbonaceous clay and silt, fine to coarse grained sand, gravel; poorly sorted, unconsolidated: lake floor and lake beach deposits are indicated beneath the southern end of the site.

An additional unit shown approximately 100 m beyond the north east corner of the site is indicated to potentially contain peat, with the materials referred to as Quaternary swamp and lake deposits (Qm1) comprising grey to black carbonaceous mud, silt, clay, minor peat: generally unconsolidated; rare dolomite.

It should be noted that the peat containing materials (Qm1) are not indicated to be present beneath the proposed solar farm site.

4. Historical Peat Fires

The following are summaries of recent documented underground fires that have occurred in the vicinity of the subject site.

Lake Cobrico, approximately 20 km southwest of the subject site. An underground fire started in the peat bog of Lake Cobrico on 17 March 2018 and was extinguished over a month later following construction of a pipeline to saturate the ground.

Lake Bullen Merri and Lake Elingamite, approximately 15 km south and 25 km south west of the subject site respectively, experienced similar underground peat fires in autumn 2018.

The online geological mapping for the historical peat fire sites indicates that they are all underlain by Quaternary swamp and lake deposits (Qm1). These deposits are indicated to potentially contain peat as discussed in Section 3. It should be noted that such deposits are not indicated to be present beneath the proposed solar farm site and occur beyond the site boundary to the north east of the site, as noted in Section 3.

5. Field Work Methods

The field work was undertaken on 19 December 2019 and involved the drilling of six boreholes (designated BH01 to BH06). The borehole locations are shown on Drawing 1 in Appendix B, and were set out by DP personnel using a hand-held GPS unit.

The borehole locations targeted the eastern edge of the site where the geological mapping indicates the highest risk of occurrence of peat beneath the site, and in particular at the following locations:



- along the north eastern boundary (boreholes BH01 to BH03) where a geological unit (Qm1) is described as containing "*minor peat*" by the geological mapping and occurs approximately 100 m beyond the site boundary outside the site; and
- along the central part of eastern boundary (BH04 to BH06) within an area of the site underlain by the geological unit (QI2) that is not indicated to contain peat by the geological mapping but could be expected to contain some organic soils owing to its origin.

The investigation strategy was to undertake additional boreholes either between the initial six borehole locations or further to the west if peat was identified, with the aim of delineating the peat extent beneath the site if possible. As discussed below, peat was not identified in the initial six boreholes, therefore further additional boreholes were not required.

The boreholes were drilled using a push tube sampling rig, and were terminated at penetration depths of 2.4 m below the surface. Disturbed samples were collected in selected strata for logging purposes and laboratory testing.

On completion of drilling and after checking for groundwater inflows, the boreholes were backfilled with spoil and the surface tamped with hand tools.

Pocket penetrometer tests were undertaken on recovered samples to assist in the assessment of soil consistency.

Borehole co-ordinates and surface levels were recorded with a differential GPS unit, and the results are provided on the respective borehole logs in Appendix C.

All field work was undertaken by a geotechnical engineer who logged the boreholes and collected samples for visual and tactile assessment.

6. Field Work Results

6.1 Ground Conditions

Details of the conditions encountered in the boreholes are presented on the logs in Appendix C. Photographs of the recovered soil are also included in Appendix C. The logs should be read in conjunction with the explanatory notes in Appendix A. The strata are described in more detail below:

Unit 1: Topsoil - Silty Clay (CI, CI-CH) and Clayey Silt (ML-MH)

Natural soils typically comprised desiccated, hard, dark brown black and red brown, intermediate plasticity silty clay and clayey silt, with rootlets. The topsoil was between 0.05 m and 0.3 m thick.

Unit 2: Silty Clay (CH)

High plasticity silty clay was encountered beneath the topsoil to borehole termination depths of 2.4 m. The material was typically very stiff near the surface, reducing in strength to stiff and firm to stiff with depth.

The silty clay became mottled grey and grey brown with depth. Fine gravel was also encountered at depth.



6.2 Groundwater

Groundwater was not observed between ground level and 2.4 m depth at any of the locations prior to backfilling, although the boreholes were only left open for a relatively short period of time which may not have been long enough for groundwater inflow to occur.

7. Laboratory Testing

Laboratory testing was undertaken on selected samples of the underlying natural material and comprised:

- 6 moisture content tests;
- 6 flashpoint tests; and
- 6 loss on ignition tests.

Detailed test report sheets are given in Appendix D and the results are summarised in Table 1.

Location	Depth	Sample Description	Moisture Content	Flashpoint	Loss on Ignition at 550 °C
	(m)		(%)	(°C)	(%)
BH01	0.2-0.5	Silty Clay	19	>65.0	7.5
BH02	0.4-0.7	Silty Clay	30	>65.0	6.2
BH03	0.0-0.2	Silty Clay	19	>65.0	8.5
BH04	0.5	Silty Clay	22	>65.0	7.4
BH05	0.3-0.5	Silty Clay	26	>65.0	5.1
BH06	0.6-0.9	Silty Clay	28	>65.0	6.8

Table 1: Results of Laboratory Tests

Based on the above test results, the field moisture content is between 19% and 30%.

The loss on ignition test results indicate values of between 5.1% and 8.5% at 550 °C. Based on the Glossary section of the CSIRO Australian Soil Classification website (see References for website address), "*organic materials*" are those that are plant derived organic accumulations that are saturated with water for varying times and have between 12% and 20% of organic carbon, depending on the percentage of clay. The soils from the subject site are predominantly described as silty clays. For a clay content of greater than 60%, loss on ignition can be used to estimate organic carbon by dividing by a factor of 2.7, as detailed on the CSIRO website. Using this method gives a range of organic carbon values of between approximately 2% and 3%, i.e. well below the threshold of 12% that defines an organic soil.

Similarly, an organic soil is classified as "*peat*" in accordance with the Australian Standard 'AS1727-2017- Site Investigation' if the soil contains more than 25% of organic matter by mass.

Hence the samples tested can be considered to contain marginal amounts of organic carbon and by inference, could not be classified as peat.



8. Discussion

The process for field identification of peat in AS1726-2017 Site Investigation is defined as follows: "Does the soil have a spongy feel or fibrous texture, with significant visible organic matter and an organic odour?" Based on the field visual and olfactory evidence and the process in AS1726-2017, no peat was identified at the subject site.

In addition, based on the six laboratory test results indicating carbon matter at a maximum of 3.1%, the clays at the subject site are not considered to contain sufficient quantities of organic material to either be classified as peat or to present any risk of combustion.

Furthermore, the occurrence of historical peat fires in the vicinity of the site as discussed in Section 4 is not considered pose a risk to the subject site, as the underlying ground conditions are not the same.

Therefore, it can be concluded that based on the field observations and the laboratory tests undertaken, the risk of the soil at the subject site containing potentially flammable materials (i.e. peat) is considered to be negligible.

This assessment only presents discussion on the composition of the soil within the top 2.4 m at the six locations on the site and has not considered the combustibility of surface vegetation (e.g. weeds, grasses, trees etc.) nor the combustibility of the man-made infrastructure associated with the solar farm.

9. References

Geology Web Map Service Maintained by the Victorian Department of Primary Industries - Earth Resource Development Division http://dpsyddev01/#share=g-01d9a8b551dafbe422da47a15a1c9523

Visualising Victoria's Groundwater (VVG) website (http://www.vvg.org.au/)

Australian Standard AS1726-2017 Site Investigation, May 2017, Standards Australia

Glossary section of the CSIRO Australian Soil Classification website (https://www.clw.csiro.au/aclep/asc_re_on_line_V2/soilglos.htm),

Self-Ignition Temperature of Peat, Journal of Physics: Conference Series, A Taufik Arief et al 2019 J. Phys.: Conf. Ser. 1198 042021

10. Limitations

Douglas Partners (DP) has prepared this report for this project at Bookaar Solar Farm in accordance with DP's proposal GGG190054 dated 30 September 2019 and acceptance received from Richard Seymour dated 4 December 2019. The work was carried out under DP's Conditions of Engagement. This report is provided for the exclusive use of Bookaar Renewables Pty Ltd for this project only and for the purposes as described in the report. It should not be used by or relied upon for other projects or purposes on the same or other site or by a third party. Any party so relying upon this report beyond its



exclusive use and purpose as stated above, and without the express written consent of DP, does so entirely at its own risk and without recourse to DP for any loss or damage. In preparing this report DP has necessarily relied upon information provided by the client and/or their agents.

The results provided in the report are indicative of the sub-surface conditions on the site only at the specific sampling and/or testing locations, and then only to the depths investigated and at the time the work was carried out. Sub-surface conditions can change abruptly due to variable geological processes and also as a result of human influences. Such changes may occur after DP's field testing has been completed.

DP's advice is based upon the conditions encountered during this investigation. The accuracy of the advice provided by DP in this report may be affected by undetected variations in ground conditions across the site between and beyond the sampling and/or testing locations. The advice may also be limited by budget constraints imposed by others or by site accessibility.

This report must be read in conjunction with all of the attached and should be kept in its entirety without separation of individual pages or sections. DP cannot be held responsible for interpretations or conclusions made by others unless they are supported by an expressed statement, interpretation, outcome or conclusion stated in this report.

This report, or sections from this report, should not be used as part of a specification for a project, without review and agreement by DP. This is because this report has been written as advice and opinion rather than instructions for construction.

The contents of this report do not constitute formal design components such as are required, by the Health and Safety Legislation and Regulations, to be included in a Safety Report specifying the hazards likely to be encountered during construction and the controls required to mitigate risk. This design process requires risk assessment to be undertaken, with such assessment being dependent upon factors relating to likelihood of occurrence and consequences of damage to property and to life. This, in turn, requires project data and analysis presently beyond the knowledge and project role respectively of DP. DP may be able, however, to assist the client in carrying out a risk assessment of potential hazards contained in the Comments section of this report, as an extension to the current scope of works, if so requested, and provided that suitable additional information is made available to DP. Any such risk assessment would, however, be necessarily restricted to the (geotechnical / environmental / groundwater) components set out in this report and to their application by the project designers to project design, construction, maintenance and demolition.

Douglas Partners Pty Ltd

Appendix A

About This Report



Introduction

These notes have been provided to amplify DP's report in regard to classification methods, field procedures and the comments section. Not all are necessarily relevant to all reports.

DP's reports are based on information gained from limited subsurface excavations and sampling, supplemented by knowledge of local geology and experience. For this reason, they must be regarded as interpretive rather than factual documents, limited to some extent by the scope of information on which they rely.

Copyright

This report is the property of Douglas Partners Pty Ltd. The report may only be used for the purpose for which it was commissioned and in accordance with the Conditions of Engagement for the commission supplied at the time of proposal. Unauthorised use of this report in any form whatsoever is prohibited.

Borehole and Test Pit Logs

The borehole and test pit logs presented in this report are an engineering and/or geological interpretation of the subsurface conditions, and their reliability will depend to some extent on frequency of sampling and the method of drilling or excavation. Ideally, continuous undisturbed sampling or core drilling will provide the most reliable assessment, but this is not always practicable or possible to justify on economic grounds. In any case the boreholes and test pits represent only a very small sample of the total subsurface profile.

Interpretation of the information and its application to design and construction should therefore take into account the spacing of boreholes or pits, the frequency of sampling, and the possibility of other than 'straight line' variations between the test locations.

Groundwater

Where groundwater levels are measured in boreholes there are several potential problems, namely:

 In low permeability soils groundwater may enter the hole very slowly or perhaps not at all during the time the hole is left open;

- A localised, perched water table may lead to an erroneous indication of the true water table;
- Water table levels will vary from time to time with seasons or recent weather changes. They may not be the same at the time of construction as are indicated in the report; and
- The use of water or mud as a drilling fluid will mask any groundwater inflow. Water has to be blown out of the hole and drilling mud must first be washed out of the hole if water measurements are to be made.

More reliable measurements can be made by installing standpipes which are read at intervals over several days, or perhaps weeks for low permeability soils. Piezometers, sealed in a particular stratum, may be advisable in low permeability soils or where there may be interference from a perched water table.

Reports

The report has been prepared by qualified personnel, is based on the information obtained from field and laboratory testing, and has been undertaken to current engineering standards of interpretation and analysis. Where the report has been prepared for a specific design proposal, the information and interpretation may not be relevant if the design proposal is changed. If this happens, DP will be pleased to review the report and the sufficiency of the investigation work.

Every care is taken with the report as it relates to interpretation of subsurface conditions, discussion of geotechnical and environmental aspects, and recommendations or suggestions for design and construction. However, DP cannot always anticipate or assume responsibility for:

- Unexpected variations in ground conditions. The potential for this will depend partly on borehole or pit spacing and sampling frequency;
- Changes in policy or interpretations of policy by statutory authorities; or
- The actions of contractors responding to commercial pressures.

If these occur, DP will be pleased to assist with investigations or advice to resolve the matter.

About this Report

Site Anomalies

In the event that conditions encountered on site during construction appear to vary from those which were expected from the information contained in the report, DP requests that it be immediately notified. Most problems are much more readily resolved when conditions are exposed rather than at some later stage, well after the event.

Information for Contractual Purposes

Where information obtained from this report is provided for tendering purposes, it is recommended that all information, including the written report and discussion, be made available. In circumstances where the discussion or comments section is not relevant to the contractual situation, it may be appropriate to prepare a specially edited document. DP would be pleased to assist in this regard and/or to make additional report copies available for contract purposes at a nominal charge.

Site Inspection

The company will always be pleased to provide engineering inspection services for geotechnical and environmental aspects of work to which this report is related. This could range from a site visit to confirm that conditions exposed are as expected, to full time engineering presence on site.

Sampling

Sampling is carried out during drilling or test pitting to allow engineering examination (and laboratory testing where required) of the soil or rock.

Disturbed samples taken during drilling provide information on colour, type, inclusions and, depending upon the degree of disturbance, some information on strength and structure.

Undisturbed samples are taken by pushing a thinwalled sample tube into the soil and withdrawing it to obtain a sample of the soil in a relatively undisturbed state. Such samples yield information on structure and strength, and are necessary for laboratory determination of shear strength and compressibility. Undisturbed sampling is generally effective only in cohesive soils.

Test Pits

Test pits are usually excavated with a backhoe or an excavator, allowing close examination of the insitu soil if it is safe to enter into the pit. The depth of excavation is limited to about 3 m for a backhoe and up to 6 m for a large excavator. A potential disadvantage of this investigation method is the larger area of disturbance to the site.

Large Diameter Augers

Boreholes can be drilled using a rotating plate or short spiral auger, generally 300 mm or larger in diameter commonly mounted on a standard piling rig. The cuttings are returned to the surface at intervals (generally not more than 0.5 m) and are disturbed but usually unchanged in moisture content. Identification of soil strata is generally much more reliable than with continuous spiral flight augers, and is usually supplemented by occasional undisturbed tube samples.

Continuous Spiral Flight Augers

The borehole is advanced using 90-115 mm diameter continuous spiral flight augers which are withdrawn at intervals to allow sampling or in-situ testing. This is a relatively economical means of drilling in clays and sands above the water table. Samples are returned to the surface, or may be collected after withdrawal of the auger flights, but they are disturbed and may be mixed with soils from the sides of the hole. Information from the drilling (as distinct from specific sampling by SPTs or undisturbed samples) is of relatively low reliability, due to the remoulding, possible mixing or softening of samples by groundwater.

Non-core Rotary Drilling

The borehole is advanced using a rotary bit, with water or drilling mud being pumped down the drill rods and returned up the annulus, carrying the drill cuttings. Only major changes in stratification can be determined from the cuttings, together with some information from the rate of penetration. Where drilling mud is used this can mask the cuttings and reliable identification is only possible from separate sampling such as SPTs.

Continuous Core Drilling

A continuous core sample can be obtained using a diamond tipped core barrel, usually with a 50 mm internal diameter. Provided full core recovery is achieved (which is not always possible in weak rocks and granular soils), this technique provides a very reliable method of investigation.

Standard Penetration Tests

Standard penetration tests (SPT) are used as a means of estimating the density or strength of soils and also of obtaining a relatively undisturbed sample. The test procedure is described in Australian Standard 1289, Methods of Testing Soils for Engineering Purposes - Test 6.3.1.

The test is carried out in a borehole by driving a 50 mm diameter split sample tube under the impact of a 63 kg hammer with a free fall of 760 mm. It is normal for the tube to be driven in three successive 150 mm increments and the 'N' value is taken as the number of blows for the last 300 mm. In dense sands, very hard clays or weak rock, the full 450 mm penetration may not be practicable and the test is discontinued.

The test results are reported in the following form.

 In the case where full penetration is obtained with successive blow counts for each 150 mm of, say, 4, 6 and 7 as:

4,6,7 N=13

In the case where the test is discontinued before the full penetration depth, say after 15 blows for the first 150 mm and 30 blows for the next 40 mm as:

15, 30/40 mm

Sampling Methods

The results of the SPT tests can be related empirically to the engineering properties of the soils.

Dynamic Cone Penetrometer Tests / Perth Sand Penetrometer Tests

Dynamic penetrometer tests (DCP or PSP) are carried out by driving a steel rod into the ground using a standard weight of hammer falling a specified distance. As the rod penetrates the soil the number of blows required to penetrate each successive 150 mm depth are recorded. Normally there is a depth limitation of 1.2 m, but this may be extended in certain conditions by the use of extension rods. Two types of penetrometer are commonly used.

- Perth sand penetrometer a 16 mm diameter flat ended rod is driven using a 9 kg hammer dropping 600 mm (AS 1289, Test 6.3.3). This test was developed for testing the density of sands and is mainly used in granular soils and filling.
- Cone penetrometer a 16 mm diameter rod with a 20 mm diameter cone end is driven using a 9 kg hammer dropping 510 mm (AS 1289, Test 6.3.2). This test was developed initially for pavement subgrade investigations, and correlations of the test results with California Bearing Ratio have been published by various road authorities.

Soil Descriptions

Description and Classification Methods

The methods of description and classification of soils and rocks used in this report are generally based on Australian Standard AS1726:2017, Geotechnical Site Investigations. In general, the descriptions include strength or density, colour, structure, soil or rock type and inclusions.

Soil Types

Soil types are described according to the predominant particle size, qualified by the grading of other particles present:

Туре	Particle size (mm)
Boulder	>200
Cobble	63 - 200
Gravel	2.36 - 63
Sand	0.075 - 2.36
Silt	0.002 - 0.075
Clay	<0.002

The sand and gravel sizes can be further subdivided as follows:

Туре	Particle size (mm)
Coarse gravel	19 - 63
Medium gravel	6.7 - 19
Fine gravel	2.36 - 6.7
Coarse sand	0.6 - 2.36
Medium sand	0.21 - 0.6
Fine sand	0.075 - 0.21

Definitions of grading terms used are:

- Well graded a good representation of all particle sizes
- Poorly graded an excess or deficiency of particular sizes within the specified range
- Uniformly graded an excess of a particular particle size
- Gap graded a deficiency of a particular particle size with the range

The proportions of secondary constituents of soils are described as follows:

In	fine	grained	soils	(>35%	fines)
----	------	---------	-------	-------	-------	---

Term	Proportion	Example		
	of sand or			
	gravel			
And	Specify	Clay (60%) and		
		Sand (40%)		
Adjective	>30%	Sandy Clay		
With	15 – 30%	Clay with sand		
Trace	0 - 15%	Clay with trace		
		sand		

In coarse grained soils (>65% coarse)

with	clays	or	silts	•

Term	Proportion of fines	Example
And	Specify	Sand (70%) and Clay (30%)
Adjective	>12%	Clayey Sand
With	5 - 12%	Sand with clay
Trace	0 - 5%	Sand with trace
		clay

In coarse grained soils (>65% coarse)
- with coarser fraction

Term	Proportion	Example
	of coarser	
	fraction	
And	Specify	Sand (60%) and
		Gravel (40%)
Adjective	>30%	Gravelly Sand
With	15 - 30%	Sand with gravel
Trace	0 - 15%	Sand with trace
		gravel

The presence of cobbles and boulders shall be specifically noted by beginning the description with 'Mix of Soil and Cobbles/Boulders' with the word order indicating the dominant first and the proportion of cobbles and boulders described together.

Soil Descriptions

Cohesive Soils

Cohesive soils, such as clays, are classified on the basis of undrained shear strength. The strength may be measured by laboratory testing, or estimated by field tests or engineering examination. The strength terms are defined as follows:

Description	Abbreviation	Undrained shear strength (kPa)
Very soft	VS	<12
Soft	S	12 - 25
Firm	F	25 - 50
Stiff	St	50 - 100
Very stiff	VSt	100 - 200
Hard	Н	>200
Friable	Fr	-

Cohesionless Soils

Cohesionless soils, such as clean sands, are classified on the basis of relative density, generally from the results of standard penetration tests (SPT), cone penetration tests (CPT) or dynamic penetrometers (PSP). The relative density terms are given below:

Relative Density	Abbreviation	Density Index (%)
Very loose	VL	<15
Loose	L	15-35
Medium dense	MD	35-65
Dense	D	65-85
Very dense	VD	>85

Soil Origin

It is often difficult to accurately determine the origin of a soil. Soils can generally be classified as:

- Residual soil derived from in-situ weathering of the underlying rock;
- Extremely weathered material formed from in-situ weathering of geological formations. Has soil strength but retains the structure or fabric of the parent rock;
- Alluvial soil deposited by streams and rivers;

- Estuarine soil deposited in coastal estuaries;
- Marine soil deposited in a marine environment;
- Lacustrine soil deposited in freshwater lakes;
- Aeolian soil carried and deposited by wind;
- Colluvial soil soil and rock debris transported down slopes by gravity;
- Topsoil mantle of surface soil, often with high levels of organic material.
- Fill any material which has been moved by man.

Moisture Condition – Coarse Grained Soils For coarse grained soils the moisture condition

should be described by appearance and feel using the following terms:

- Dry (D) Non-cohesive and free-running.
- Moist (M) Soil feels cool, darkened in colour.

Soil tends to stick together. Sand forms weak ball but breaks easily.

Wet (W) Soil feels cool, darkened in colour.

Soil tends to stick together, free water forms when handling.

Moisture Condition – Fine Grained Soils

For fine grained soils the assessment of moisture content is relative to their plastic limit or liquid limit, as follows:

- 'Moist, dry of plastic limit' or 'w <PL' (i.e. hard and friable or powdery).
- 'Moist, near plastic limit' or 'w ≈ PL (i.e. soil can be moulded at moisture content approximately equal to the plastic limit).
- 'Moist, wet of plastic limit' or 'w >PL' (i.e. soils usually weakened and free water forms on the hands when handling).
- 'Wet' or 'w ≈LL' (i.e. near the liquid limit).
- 'Wet' or 'w >LL' (i.e. wet of the liquid limit).

Symbols & Abbreviations

Introduction

These notes summarise abbreviations commonly used on borehole logs and test pit reports.

Drilling or Excavation Methods

С	Core drilling
R	Rotary drilling
SFA	Spiral flight augers
NMLC	Diamond core - 52 mm dia
NQ	Diamond core - 47 mm dia
HQ	Diamond core - 63 mm dia
PQ	Diamond core - 81 mm dia

Water

\triangleright	Water seep
\bigtriangledown	Water level

Sampling and Testing

- A Auger sample
- B Bulk sample
- D Disturbed sample
- E Environmental sample
- U₅₀ Undisturbed tube sample (50mm)
- W Water sample
- pp Pocket penetrometer (kPa)
- PID Photo ionisation detector
- PL Point load strength Is(50) MPa
- S Standard Penetration Test
- V Shear vane (kPa)

Description of Defects in Rock

The abbreviated descriptions of the defects should be in the following order: Depth, Type, Orientation, Coating, Shape, Roughness and Other. Drilling and handling breaks are not usually included on the logs.

Defect Type

В	Bedding plane
Cs	Clay seam
Cv	Cleavage
Cz	Crushed zone
Ds	Decomposed seam
F	Fault
J	Joint
Lam	Lamination
Pt	Parting
Sz	Sheared Zone
V	Vein

Orientation

The inclination of defects is always measured from the perpendicular to the core axis.

h horizontal

a

- v vertical
- sh sub-horizontal
- sv sub-vertical

Coating or Infilling Term

clean
coating
healed
infilled
stained
tight
veneer

Coating Descriptor

ca	calcite
cbs	carbonaceous
cly	clay
fe	iron oxide
mn	manganese
slt	silty

Shape

cu	curved
ir	irregular
pl	planar
st	stepped
un	undulating

Roughness

ро	polished
ro	rough
sl	slickensided
sm	smooth
vr	very rough

Other

fg	fragmented
bnd	band
qtz	quartz

Symbols & Abbreviations

Graphic Symbols for Soil and Rock

General


A. A. A. Z	
\times	

Asphalt Road base

Concrete

Filling

Soils



Topsoil

Peat

Clay

Silty clay

Sandy clay

Gravelly clay

Shaly clay

Silt

Clayey silt

Sandy silt

Sand

Clayey sand

Silty sand


Gravel

Sandy gravel

Cobbles, boulders

Talus

Sedimentary Rocks



Metamorphic Rocks

Slate, phyllite, schist

Quartzite

Gneiss

Igneous Rocks

Granite

Dolerite, basalt, andesite


Dacite, epidote

Tuff, breccia


Porphyry

Appendix B

Borehole Location Plan Proposed Site Layout Plan

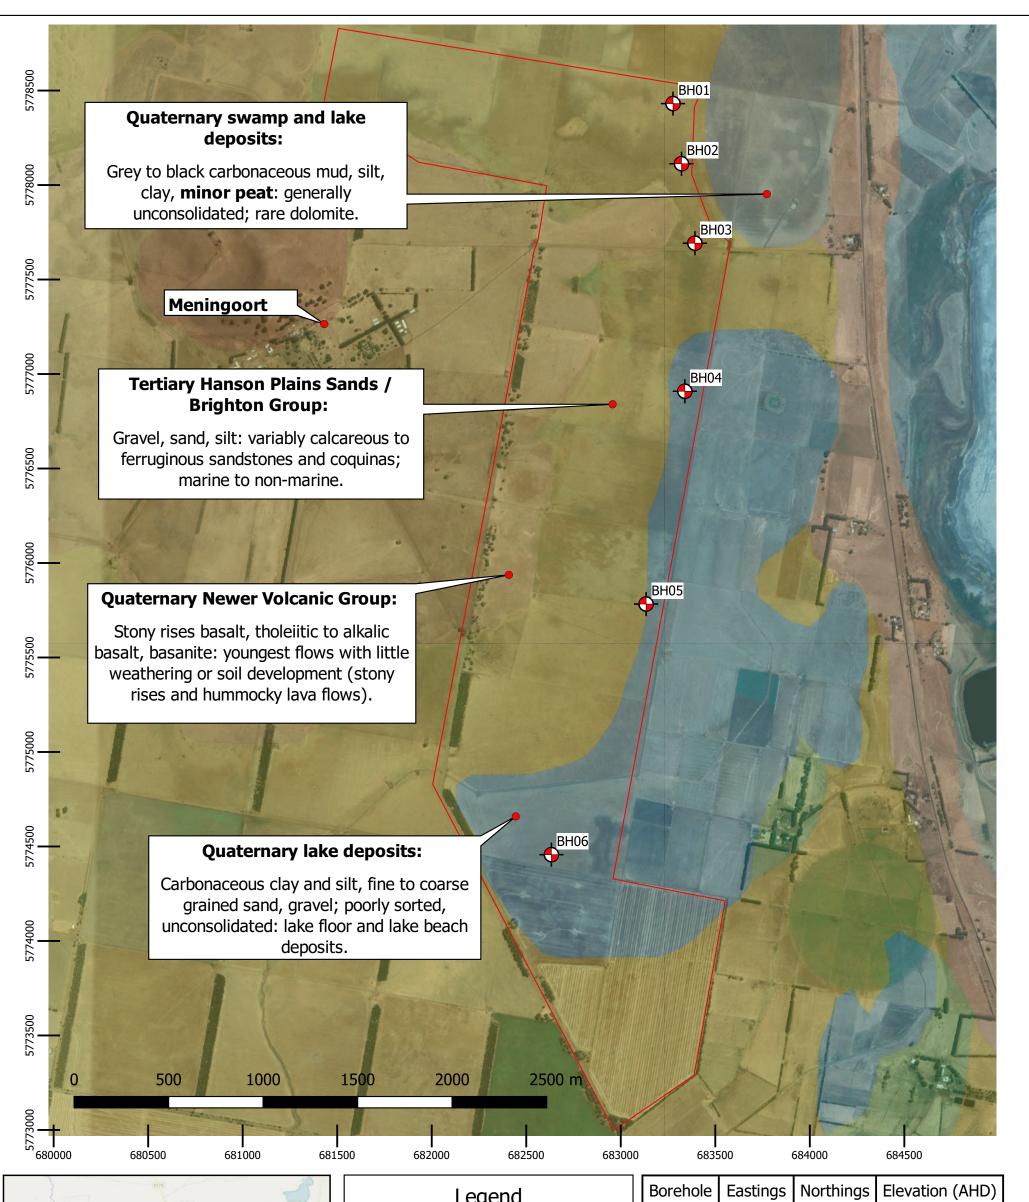

	l Legend		Borchoic	Lastings	Noraningo		
	Bookaar Solar Farm Sit	e Boundary	BH01	683276.49	5778431.36	140.76	
here in the second	- Borehole Locations	-	BH02	683321.44	5778113.13	140.84	
Site	Google Satellite		BH03	683392.47	5777692.56	140.95	
Selver 1 and a			BH04	683339.16	5776909.21	139.9	
			BH05	683134.17	5775783.15	139.61	
Comperdition			BH06	682633.29	5774456.87	139.13	
Normal Annual							
	GSV Geological Unit (250K)						
LOCALITY MAP							
					u		
	Borehole Location P	Borehole Location Plan Peat Assessment Meningoort Road, Bookaar Solar Far			\square	OFFICE: Geelong	
Douglas Partners					(/N\	DRAWN BY: GSG	
Geotechnics Environment Groundwate	Meningoort Road, Bo					DATE: 30.01.2020	
CLIENT: Bookaar Renewables Pty Ltd	PROJECT No: 87084.00	PROJECT No: 87084.00 DRAWING No: 01)1	SCALE: 1:20000	

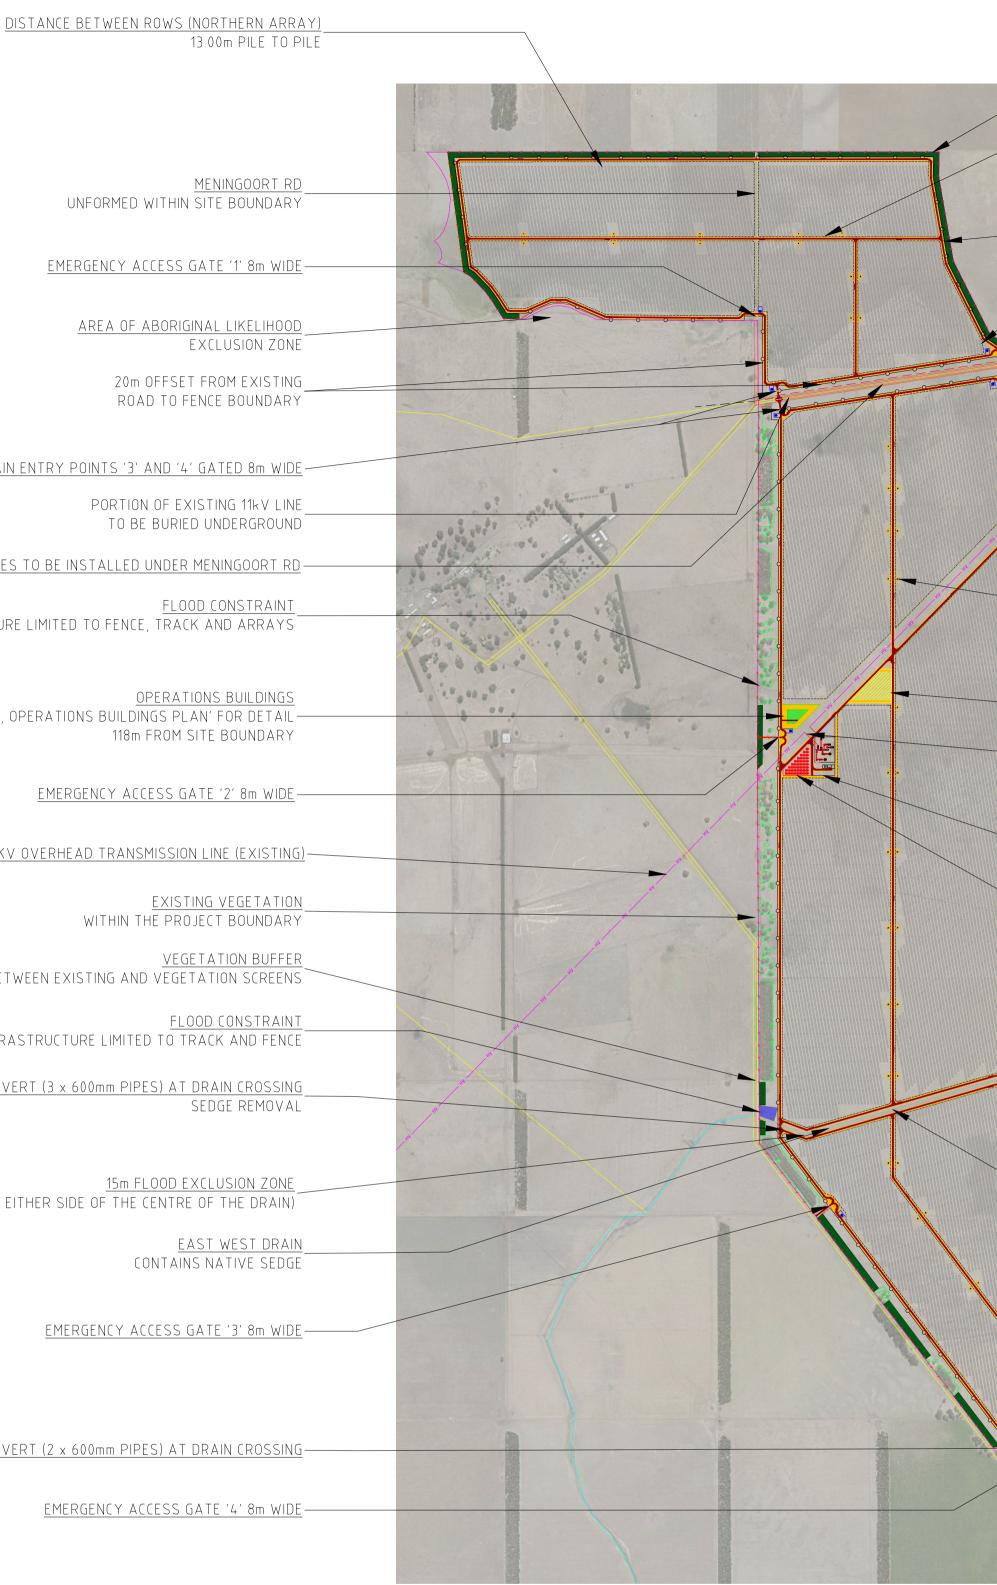

UNFORMED WITHIN SITE BOUNDARY

EMERGENCY ACCESS GATE '1' 8m WIDE-

AREA OF ABORIGINAL LIKELIHOOD EXCLUSION ZONE

> 20m OFFSET FROM EXISTING ROAD TO FENCE BOUNDARY

PORTION OF EXISTING 11kV LINE TO BE BURIED UNDERGROUND

UNDERGROUND CABLES TO BE INSTALLED UNDER MENINGOORT RD -

FLOOD CONSTRAINT INFRASTRUCTURE LIMITED TO FENCE, TRACK AND ARRAYS

OPERATIONS BUILDINGS SEE 'APPENDIX D, OPERATIONS BUILDINGS PLAN' FOR DETAIL-118m FROM SITE BOUNDARY

EMERGENCY ACCESS GATE '2' 8m WIDE -

220KV OVERHEAD TRANSMISSION LINE (EXISTING)

EXISTING VEGETATION WITHIN THE PROJECT BOUNDARY

VEGETATION BUFFER 5m BETWEEN EXISTING AND VEGETATION SCREENS

FLOOD CONSTRAINT INFRASTRUCTURE LIMITED TO TRACK AND FENCE

<u>CULVERT (3 x 600mm PIPES) AT DRAIN CROSSING</u> sedge removal

15m FLOOD EXCLUSION ZONE (7.5m EITHER SIDE OF THE CENTRE OF THE DRAIN)

> <u>EAST WEST DRAIN</u> CONTAINS NATIVE SEDGE

EMERGENCY ACCESS GATE '3' 8m WIDE-

CULVERT (2 x 600mm PIPES) AT DRAIN CROSSING-

EMERGENCY ACCESS GATE '4' 8m WIDE —

SITE PLAN APPENDIX LIST					<u>SILE P</u>	lan view
• APPENDIX A: BATTERY AND SUBSTATION PLAN					SCAI	_E 1:15000
APPENDIX B: SUBSTATION ELEVATION						
APPENDIX C: BATTERY ELEVATION						
APPENDIX D: OPERATIONS BUILDINGS ELEVATION						
APPENDIX E: GATE ELEVATION						
APPENDIX F: TRACKER ELEVATION						
APPENDIX G: INVERTER ELEVATION						
APPENDIX H: INVERTER MAX. ELEVATION					REVISION PANE	
APPENDIX I: PILE EXAMPLE		REV	DATE	DRN	DETAILS	
		7	13/10/20	H.S	ISSUED WITH DCA UPDATES	
		6	09/07/20	H.K	UPDATED AS PER CLIENT COMMENTS	
		5	01/07/20	H.S	UPDATED BASED ON CLIENT FEEDBACK	
	٦	4	19/06/20	H.S	FINAL ISSUE FOR DEVELOPMENT APPROVAL	
NOT FOR CONSTRUCTION		3	17/06/20	H.S	ADDED INVERTER NUMBERING	
		CURR	ENT REV CO	ONTRAC	TOR: GSES	CURRENT REV PROJECT

	VEGETATION SCREEN 20m WIDE
	— DARLINGTON CAMPERDOWN ROAD
	<u>ASSET PROTECTION ZONE (APZ)</u> 10m WIDE APZ LOCATED AROUND THE INTERNAL TRACK NETWORK INCLUDING THE PERIMETER ACCESS TRACK — TRACKER LENGTH 56m
MAIN SITE ACCESS	- FARM ACCESS TO NORTH EAST FIELD OUTSIDE SITE
	PROPOSED IMPROVEMENTS TO THE INTERSECTION OF MENINGOORT ROAD AND DARLINGTON-CAMPERDOWN ROAD
	— 11kV OVERHEAD LINE (EXISTING, CONT.)
	- <u>MENINGOORT ROAD (UPGRADE TO 7m WIDE)</u>
	- MAIN ENTRY POINTS '1' AND '2' GATED 8m WIDE
	— 6m GAP IN VEGETATION SCREENING
	SITE ACCESS TO DRAIN 2 x 3m WIDE GATE ON EACH FENCE LINE
	INVERTER STATION
	TEMPORARY CONSTRUCTION COMPOUND AND LAYDOWN AREA 1.44 ha WITH 10m APZ
	POINT OF CONNECTION TO EXISTING TRANSMISSION LINE 186m FROM SITE BOUNDARY
	<u>SUBSTATION AREA</u> — 1.76 ha WITH 10m APZ 214m FROM SITE BOUNDARY
	BATTERY AREA — 0.91 ha WITH 10m APZ 102m FROM SITE BOUNDARY
	<u>NORTH SOUTH DRAIN</u> — WITHIN DRAINAGE RESERVE 10m OUTSIDE SITE BOUNDARY
	<u>CULVERT (12 x 300mm PIPES) AT DRAIN CROSSING</u> REMOVAL OF SEDGE
	<u>SECURITY FENCE (2.5m HIGH)</u> OFFSET 2m TO SCREEN
	- AGRICULTURAL FENCE (1.2m HIGH)
	<u>UNDERGROUND CABLE</u> —HORIZONTAL BORE TO BE USED TO INSTALL CABLE UNDERNEATH EXISTING DRAIN WITHOUT DISTURBING AREA
	— <u>CULVERT (2 x 300mm PIPES) AT DRAIN CROSSING</u>
171m	<u>NORTH SOUTH DRAIN</u> LOCATED WITHIN 10m WIDE DRAINAGE RESERVE
	- <u>CULVERT (1 x 300mm PIPE) AT DRAIN CROSSING</u>
	— <u>SITE BOUNDARY</u> <u>DRAINAGE RESERVE EXCLUSION ZONE (10m)</u> TRACK AND CABLES ONLY; HORIZONTAL BORE TO BE USED TO INSTALL CABLE UNDERNEATH DRAINAGE RESERVE WITHOUT DISTURBING AREA
And the second s	<u>WATER TANK</u> 100kL INSTALLED ON 16m x 26m HARDSTAND WATER TANKS ARE LOCATED AT EACH ACCESS POINT
	<u>DISTANCE BETWEEN ROWS (SOUTHERN ARRAY)</u> 12.75m PILE TO PILE

DESCRIP MATERIAL 240mm2 SINGL hv cable DC CABLE SUB-ARRAY (10m DC CABLE STRING (4mm2) INVERTER STATIONS SMA MVPS 5 TYPICAL 4 MODULES TRACKERS NEXTRACKER || 1000V 32-INPUT COME COMBINER BOXES NEXTRACKER PIE PIER

OVERALL SYSTEM SPECIFICATION									
MODULE	641088	TYPICAL 440W							
INVERTER STATION	4 1	SMA MVPS 5500-EV (CONTAINING 2x 2750kVA INVERTERS)							
INVERTER	82	SMA SUNNY CENTRAL 2750-EV							
BATTERY	100	MWh							
DC CAPACITY	282.08	MWp							
AC CAPACITY	200.00	MVA (LIMITED FROM 225.5MVA)							
DC/AC RATIO	1.41								

NOTES:

- 2. PRINT IN COLOUR.
- З. TERMS AND CONDITIONS.
- 4.

LEGEND:

— ну —

_ _ _ _

____O____O___

XXX

- . ____ .

- · ___ · _

INVERTER STATION (ON HARDSTAND) WATER TANK WITH HARDSTAND SITE ACCESS GATE (MAIN & EMERGENCY) INTERNAL TRACK NETWORK ASSET PROTECTION ZONE (APZ) ACCESS ROAD (EXISTING) EXISTING VEGETATION PROPOSED VEGETATION OVERHEAD HV TRANSMISSION LINE OVERHEAD HV TRANSMISSION LINE (EXISTING) OVERHEAD 11kV LINE (EXISTING) UNDERGROUND 11kV LINE TRANSMISSION LINE EASEMENT SECURITY FENCE DRAINAGE RESERVE PROJECT BOUNDARY ARRAY AREA BOUNDARY LAYDOWN AREA OPERATIONS AREA BATTERY AREA SUBSTATION AREA 1.2m HIGH AGRICULTURAL-STYLE FENCE ACCESS GATE TO VEGETATION SCREEN & DRAIN (3m)

DESIGN PANEL APR'D CURRENT REV 29/05/2020 AUTHORISED 29/05/2020 13/10/2020 DESIGNED ng/e° AUTHORISED h.smith A.BONANNO A.B 29/05/2020 SIGNATURE A.BONANNO DRAWN A.B A.B SIGNATURE h.smith REVIEWED 29/05/2020 A.B NG ELECTRICAL PTY LTD B.COOK A.B CONTRACTOR: GSES


BILL OF MATERIALS (INDICATIVE)

PTION	QUANTITY	UNITS
E CORE AI	285	km
nm2) TWIN Cu	120	km
2) TWIN Cu	3400	km
5500-EV	4 1	ΕA
440W	641088	ΕA
GEMINI 2P	5724	ΕA
BINER BOX (IP65)	954	ΕA
ER, 4m DEEP	57240	ΕA

1. ALL DIMENSIONS ARE IN MILLIMETRES AND LEVELS IN MILLIMETRES UNLESS NOTED OTHERWISE. ALL DIMENSIONS TO BE VERIFIED ON SITE BY CONTRACTOR.

THIS DRAWING IS BASED ON THE INFORMATION SUPPLIED TO THE DESIGNER FROM ITS CLIENTS OR SUBCONTRACTORS AND HAS BEEN PROVIDED IN ACCORDANCE WITH GSES'

EXACT INVERTER LOCATION AND PIER HEIGHT TO BE CONFIRMED IN DETAILED DESIGN.

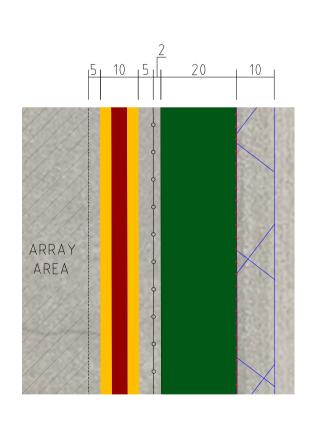

NOTE DO NOT MEASURE OR SCALE PLAN. WRITTEN DIMENSIONS (METRES) TO TAKE PRECEDENCE EASTERN BOUNDARY DETAIL (TYP)

<u>1:1250</u>

BOOKAAR 200MW SOLAR FARM 520 MENINGOORT ROAD, BOOKAR VIC 3260 SOLAR GENERATION SITE PLAN VIEW

$\triangle 1$	7						
SHT SIZE	PROJECT No: P1017	/ REVISION	н				
ΜΑΧΙΜ	D ID:		11				
SUPERS	SEDES:						
DRAWI	NG NUMBER						
P1017-01-001-01							
	10						

Appendix C

Borehole Logs Soil Sample Photographs

Bookaar Renewables Pty Ltd

Meningoort Rad, Bookaar

Bookaar Solar Farm Peat Assessment

CLIENT:

PROJECT:

LOCATION:

SURFACE LEVEL: 140.76 m AHDBORE No: BH 01 EASTING: 683276.49 **NORTHING:** 5778431.36 DIP/AZIMUTH: 90°/--

PROJECT No: 87084.00 DATE: 19/12/2019 SHEET 1 OF 1

				DIF			l: 90°/		SHEET 1 OF 1
		Description	jic		San		In Situ Testing	ŗ	Well
RL	Depth (m)	of Strata	Graphic Log	Type	Depth	Sample	Results & Comments	Water	Construction Details
-		SILTY CLAY (CI): hard, dark brown, black, with abundant rootlets (topsoil).	11						
	- 0.1	SILTY CLAY (CH): very stiff, dark brown black, M>Wp, with occasional rootlets. Swamp and lake deposits.			0.1		pp >600		-
	-	with occasional rootlets. Swamp and lake deposits.			0.2				-
	-			Е	вн	01-0.2-0.	5		-
	-			-					-
Ī	-				0.5		pp = 200-300		-
Ī	-								-
ŀ	-								-
140	-				0.8		pp = 310-340		-
ŀ	-								-
ł	-1				1.0		pp = 300		-1
ł							FF		_
-					10				
-		1.2 m: becoming stiff.			1.2				-
	-			Е		01-1.2-1.			-
	-				1.4		pp = 160-170		-
	-				1.5				-
	-								-
139	-	1.7 m: becoming M>>Wp, firm to stiff.			1.7		pp = 110-130		-
-61	-								-
Ī	-								-
ŀ	-2	2 m: mottled grey.							-2
ŀ	-	z m. modod groy.			2.1		pp = 70-90		-
ł	-								-
ł	-								-
-	- 2.4 -				-2.4-		——pp = 140-150——		
ŀ		Bore discontinued at 2.4m. Target depth met.					FF . 10 100		
-									
-									
138									

RIG: Christie Engineering


DRILLER: DP

LOGGED: AR / WB

CASING: NA

TYPE OF BORING: Push Tube WATER OBSERVATIONS: No free groundwater observed

REMARKS: Location coordinates are in WGS 84 Zone 54 H. Co-ordinates and RL's recorded with Altus NR3 dGPS unit



Bookaar Renewables Pty Ltd

Meningoort Rad, Bookaar

Bookaar Solar Farm Peat Assessment

CLIENT:

PROJECT:

LOCATION:

SURFACE LEVEL: 140.84 m AHDBORE No: BH 02 EASTING: 683321.44 **NORTHING:** 5778113.13 DIP/AZIMUTH: 90°/--

PROJECT No: 87084.00 DATE: 19/12/2019 SHEET 1 OF 1

_							1. 90 /		
	Dorth	Description	hic		San		& In Situ Testing	2	Well
RL	Depth (m)	of Strata	Graphic Log	Type	Depth	Sample	Results & Comments	Water	Construction Details
-	-	SILTY CLAY (CI): hard, dark brown, black, with abundant rootlets (topsoil).			0.1		pp >600		-
-	- 0.3 -	SILTY CLAY (CH): very stiff, dark brown black, M>Wp, with occasional rootlets to 0.8 m. Swamp and lake deposits.			0.4		pp = 330-390		-
-	-			E		 02-0.4-(-
140	- -				0.7		pp = 210-240		
-	- 1	1.1 m: becoming M>>Wp, stiff.			1.0		pp = 195-200		-1
-	- -		$ \begin{array}{c} 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\$		1.3		pp = 110-130		-
-				E	1.45 1.6 BH()2-1.45-	.1.8 pp = 140-170		-
139	-				1.8				-
-	-2				2.0		pp = 120-140		-2
-	-	2.2 m: becoming mottled grey.			2.2		pp = 120-130		
	- 2.4 - - -	Bore discontinued at 2.4m. Target depth met.							-
138	-								-

RIG: Christie Engineering


DRILLER: DP

LOGGED: AR / WB

CASING: NA

TYPE OF BORING: Push Tube WATER OBSERVATIONS: No free groundwater observed

REMARKS: Location coordinates are in WGS 84 Zone 54 H. Co-ordinates and RL's recorded with Altus NR3 dGPS unit



Bookaar Renewables Pty Ltd

Meningoort Rad, Bookaar

Bookaar Solar Farm Peat Assessment

CLIENT:

PROJECT:

LOCATION:

SURFACE LEVEL: 140.95 m AHDBORE No: BH 03 **EASTING:** 683392.47 **NORTHING:** 5777692.56 DIP/AZIMUTH: 90°/--

PROJECT No: 87084.00 DATE: 19/12/2019 SHEET 1 OF 1

_							. 90 /		
	De ti	Description	ji ji		Sam		In Situ Testing	*	Well
RL	Depth (m)	of Strata	Graphic Log	Type	Depth	Sample	Results & Comments	Water	Construction Details
-	-	SILTY CLAY (CI-CH): hard, dark grey, desiccated, trace rootlets, M <wp (topsoil).<="" td=""><td></td><td>E</td><td></td><td>03-0.0-0</td><td>.2</td><td></td><td>-</td></wp>		E		03-0.0-0	.2		-
-	- 0.2 · -	SILTY CLAY (CH): stiff, dark grey, M>Wp, trace fine rootlets. Swamp and lake deposits.			0.2 0.3		pp = 110-140		-
-	-	0.6 m: becoming stiff to very stiff.			0.6		pp = 180-190		-
140	- - 1				0.9		pp = 220-230		- 1
-	-	1.3 m: brown grey, trace fine gravel.		E	1.2 BH	03-1.2-1	.4		-
-	-				1.4		pp = 160-180		-
-	-				1.7		pp = 170-210		-
. 139	- 2				2.0		pp = 180-210		-2
-	-				2.3		pp = 160-200		-
-	- 2.4 -	Bore discontinued at 2.4m. Target depth met.							-
-	-								-
138	-								

RIG: Christie Engineering

DRILLER: DP

LOGGED: AR / WB

CASING: NA

TYPE OF BORING: Push Tube WATER OBSERVATIONS: No free groundwater observed

REMARKS: Location coordinates are in WGS 84 Zone 54 H. Co-ordinates and RL's recorded with Altus NR3 dGPS unit

SAMPLING & IN SITU TESTING LEGEND LEGEND PID Photo ionisation detector (ppm) PL(A) Point load axial test Is(50) (MPa) PL(D) Point load diametral test Is(50) (MPa) pp Pocket penetrometer (kPa) S Standard penetration test V Shear vane (kPa) Gas sample Piston sample Tube sample (x mm dia.) Water sample Water seep Water level A Auger sample B Bulk sample BLK Block sample G P U, W Douglas Partners Core drilling Disturbed sample Environmental sample CDE ₽ Geotechnics | Environment | Groundwater

Bookaar Renewables Pty Ltd

Meningoort Rad, Bookaar

Bookaar Solar Farm Peat Assessment

CLIENT: PROJECT:

LOCATION:

SURFACE LEVEL: 139.90 m AHDBORE No: BH 04 EASTING: 683339.16 **NORTHING:** 5776909.21 **DIP/AZIMUTH:** 90°/--

PROJECT No: 87084.00 DATE: 19/12/2019 SHEET 1 OF 1

				DIP	'/AZI	NUT	 90°/		SHEET 1 OF 1
\square		Description	j		Sam		& In Situ Testing	<u> </u>	Well
RL	Depth (m)	of Strata	Graphic Log	Type	Depth	Sample	Results & Comments	Water	Construction Details
		SILTY CLAY (CI-CH): hard, light brown, with rootlets, desiccated (topsoil).	1/1						
	- 0.1 -	SILTY CLAY (CH): dark grey, M>Wp, very stiff, trace fine rootlets to 0.8 m and fine sand and gravel. Lake deposits.							
	-		$\begin{array}{c} 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ 1\\ $	E	0.5 _E	H04-0.5	5 pp = 250-300		-
139	- 1	1 m: becoming firm to stiff.			0.9		pp = 200-200		-1
-	-		$ \begin{array}{c} 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\$		1.3		pp = 80-100		
-	-	1.6 m; becoming mottled brown grey.		E	1.6 BH	04-1.6-	pp = 80-90 1.8		-
138	- - 2				1.8 1.9		pp = 90-110		-2
	-				2.2		pp = 90-100		
	- 2.4 - - -	Bore discontinued at 2.4m. Target depth met.	<u>r </u>						
137	-								-

RIG: Christie Engineering


DRILLER: DP

LOGGED: AR / WB

CASING: NA

TYPE OF BORING: Push Tube WATER OBSERVATIONS: No free groundwater observed

REMARKS: Location coordinates are in WGS 84 Zone 54 H. Co-ordinates and RL's recorded with Altus NR3 dGPS unit



Bookaar Renewables Pty Ltd

Meningoort Rad, Bookaar

Bookaar Solar Farm Peat Assessment

CLIENT: PROJECT:

LOCATION:

SURFACE LEVEL: 139.61 m AHDBORE No: BH 05 **EASTING:** 683134.17 **NORTHING:** 5775783.15 DIP/AZIMUTH: 90°/--

PROJECT No: 87084.00 DATE: 19/12/2019 SHEET 1 OF 1

				DIP	'/AZI	VIUT	-: 90°/		SHEET 1 OF 1
	Dorth	Description	hic		Sam		& In Situ Testing	3r	Well
RL	Depth (m)	of Strata	Graphic Log	Type	Depth	Sample	Results & Comments	Water	Construction Details
	0.05	CLAYEY SILT (ML-MH): dark grey, moist, M <wp, \inferred stiff, with rootmat (topsoil).</wp, 							
-	-	SILTY CLAY (CH): very stiff, dark grey, moist, M>Wp, trace rootlets. Lake deposits.			0.2		pp = 300-300		-
-		0.3 m: becoming stiff.		E	0.3 BH	05-0.3-0	0.5		-
-	-	0.45 m: grey, trace fine to medium gravel.			0.5		pp = 150-200		
139	-	0.85 - 1 m: with medium to coarse sand, fine to medium gravel			0.8		pp = 150-150		
-	-1	giator			1.0		pp = 130-160		-1
-	-	1.2 m: trace orange brown and grey mottling, trace pockets of fine to medium subangular basalt gravel.		E	1.3 BH	05-1.3-	pp = 120-150		-
138	-				1.6		pp = 150-200		-
-	-	1.8 m; M>>Wp.			1.9		pp = 110-110		
-	-2				2.1		pp = 130-150		-2
-	-								
ŀ	- 2.4	Bore discontinued at 2.4m. Target depth met.	куи						
137	-								
-	-								
	-								

RIG: Christie Engineering

DRILLER: DP

LOGGED: AR / WB

CASING: NA

TYPE OF BORING: Push Tube WATER OBSERVATIONS: No free groundwater observed

REMARKS: Location coordinates are in WGS 84 Zone 54 H. Co-ordinates and RL's recorded with Altus NR3 dGPS unit

SAMPLING & IN SITU TESTING LEGEND LEGEND PID Photo ionisation detector (ppm) PL(A) Point load axial test Is(50) (MPa) PL(D) Point load diametral test Is(50) (MPa) pp Pocket penetrometer (kPa) S Standard penetration test V Shear vane (kPa) Gas sample Piston sample Tube sample (x mm dia.) Water sample Water seep Water level A Auger sample B Bulk sample BLK Block sample G P U, W Douglas Partners Core drilling Disturbed sample Environmental sample CDE ₽ Geotechnics | Environment | Groundwater

SURFACE LEVEL: 139.13 m AHDBORE No: BH 06 **EASTING:** 682633.29 **NORTHING:** 5774456.87 DIP/AZIMUTH: 90°/--

PROJECT No: 87084.00 DATE: 19/12/2019 SHEET 1 OF 1

				DIF			H: 90°/		SHEET 1 OF 1
	Dorth	Description	hic				In Situ Testing	эr	Well
RL	Depth (m)	of Strata	Graphic Log	Type	Depth	Sample	Results & Comments	Water	Construction Details
139	0.2 -	SILTY CLAY (CI-CH): red brown, with rootlets, desiccated (topsoil).							
-		SILTY CLAY (CH): very stiff, dark grey, M=Wp, trace fine rootlets to 1.4 m. Lake deposits			0.3		pp = 340-340		
-		0.6 m: becoming M>Wp, stiff to very stiff.		E	0.6 0.7 BH 0.9	06-0.6-(pp = 200-230 0.9		
138	- 1	0.9 m: becoming grey brown.			1.1		pp = 185-200		-1
		1.4 m: trace fine to medium subangular calcareous gravel, becoming orange brown.			1.4		pp = 260-340		
-		gravel, becoming orange brown.		E	BH 1.7	06-1.4-	1.7 pp = 270-290		
-									-
137	-2				2.0		pp = 230-250		-2
-	2.4 -	Bore discontinued at 2.4m. Target depth met.							
-									
-									
-									

RIG: Christie Engineering

CLIENT:

PROJECT:

LOCATION:

Bookaar Renewables Pty Ltd

Meningoort Rad, Bookaar

Bookaar Solar Farm Peat Assessment

DRILLER: DP


LOGGED: AR / WB

CASING: NA

TYPE OF BORING: Push Tube WATER OBSERVATIONS: No free groundwater observed


REMARKS: Location coordinates are in WGS 84 Zone 54 H. Co-ordinates and RL's recorded with Altus NR3 dGPS unit


SAMPLING & IN SITU TESTING LEGEND LEGEND PID Photo ionisation detector (ppm) PL(A) Point load axial test Is(50) (MPa) PL(D) Point load diametral test Is(50) (MPa) pp Pocket penetrometer (kPa) S Standard penetration test V Shear vane (kPa) Gas sample Piston sample Tube sample (x mm dia.) Water sample Water seep Water level A Auger sample B Bulk sample BLK Block sample G P U, W Douglas Partners Core drilling Disturbed sample Environmental sample CDE ₽ Geotechnics | Environment | Groundwater

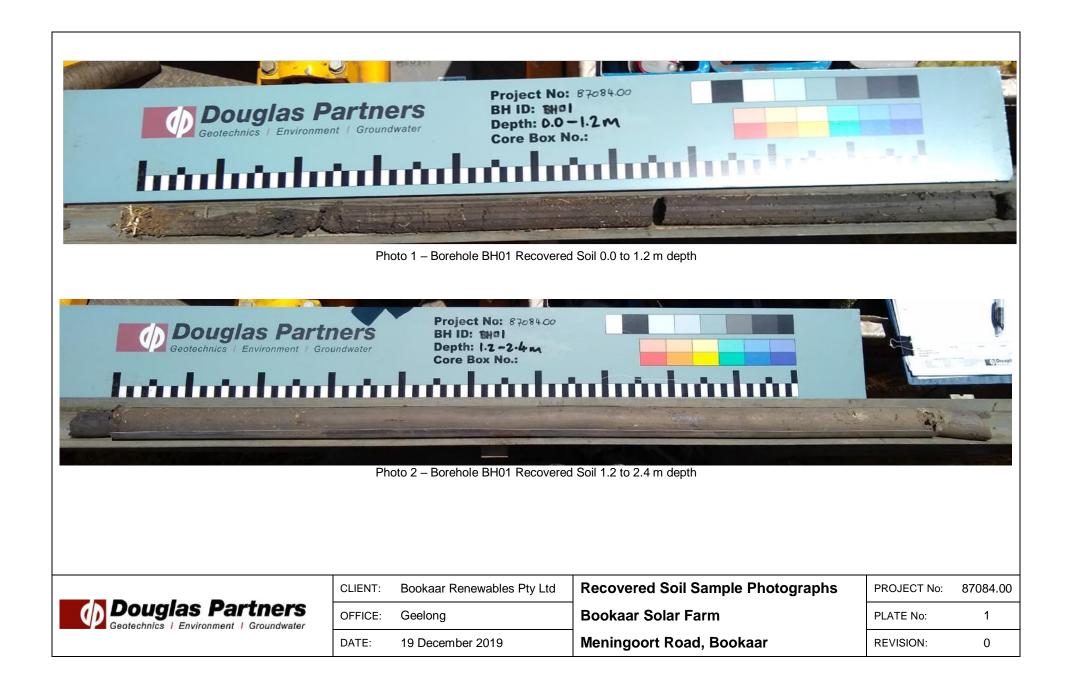






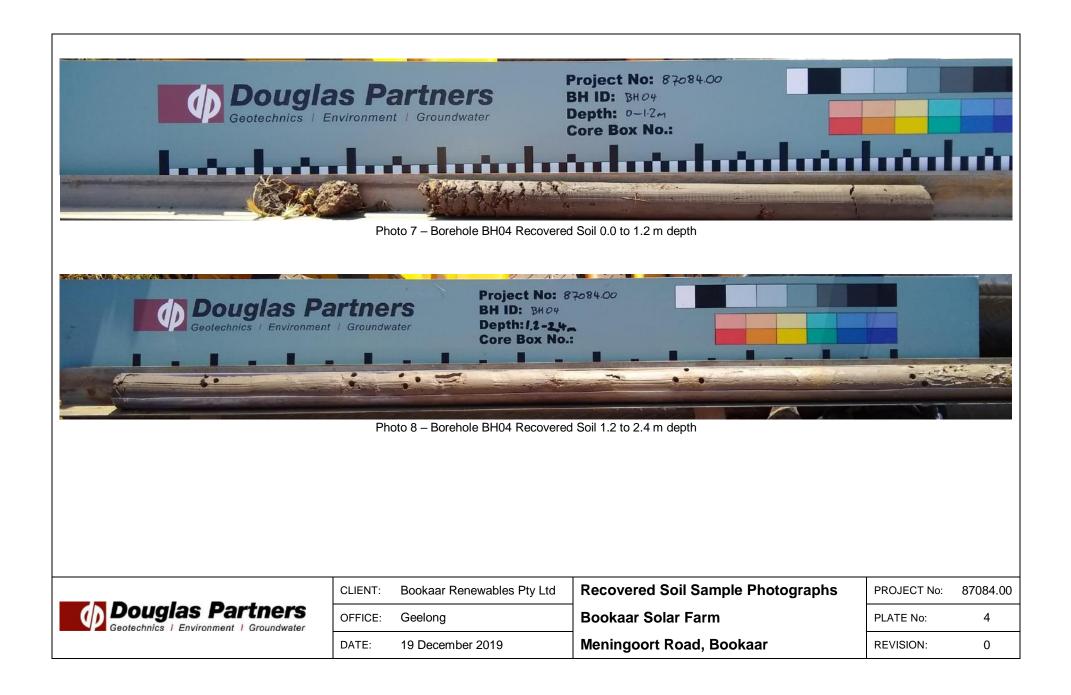

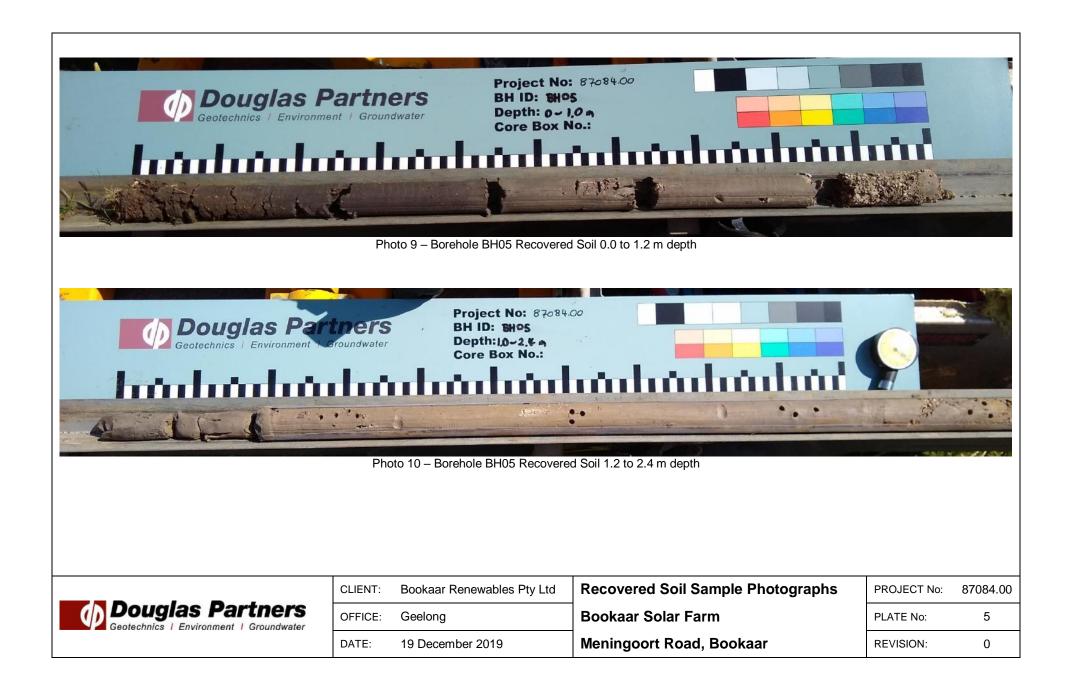

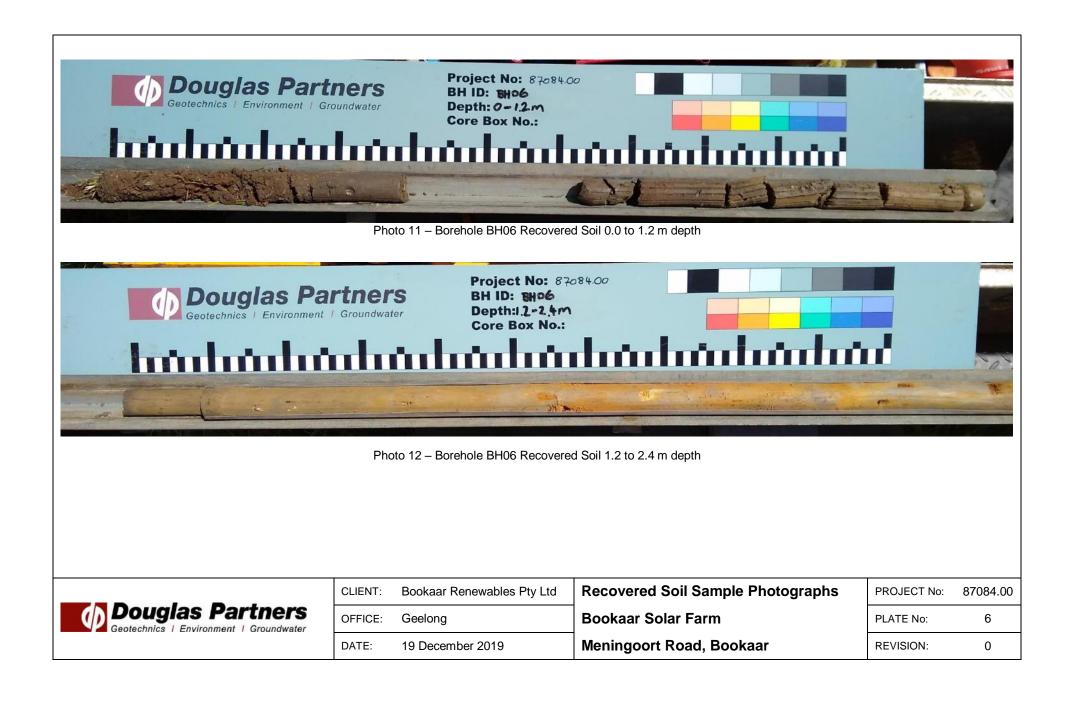

Appendix D

Laboratory Test Results



CERTIFICATE OF ANALYSIS

Work Order	: EM1922119	Page	: 1 of 4
Client	ALS WATER RESOURCES GROUP	Laboratory	Environmental Division Melbourne
Contact	: TUYEN NGUYEN	Contact	: Customer Services EM
Address	CARIBBEAN BUSINESS PARK 22 DALMORE DRIVE	Address	: 4 Westall Rd Springvale VIC Australia 3171
	SCORESBY VIC, AUSTRALIA 3179		
Telephone	: +61 03 8756 8000	Telephone	: +61-3-8549 9600
Project	: DOUGLAS (1958784)	Date Samples Received	: 23-Dec-2019 16:10
Order number	: 111595	Date Analysis Commenced	: 27-Dec-2019
C-O-C number	:	Issue Date	: 08-Jan-2020 11:32
Sampler	:		NATA
Site	:		
Quote number	: EN/109/18 Scoresby for EM batches		Accreditation No. 825
No. of samples received	: 6		Accredited for compliance with
No. of samples analysed	: 6		ISO/IEC 17025 - Testing

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. This document shall not be reproduced, except in full.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results

Additional information pertinent to this report will be found in the following separate attachments: Quality Control Report, QA/QC Compliance Assessment to assist with Quality Review and Sample Receipt Notification.

Signatories

This document has been electronically signed by the authorized signatories below. Electronic signing is carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories	Position	Accreditation Category
Dilani Fernando	Senior Inorganic Chemist	Melbourne Inorganics, Springvale, VIC



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Where a result is required to meet compliance limits the associated uncertainty must be considered. Refer to the ALS Contact for details.

Key: CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

ø = ALS is not NATA accredited for these tests.

~ = Indicates an estimated value.



Analytical Results

Sub-Matrix: SOIL (Matrix: SOIL)		Client sample ID		6389174	6389176	6389178	6389180	6389182
	C	ient sampli	ng date / time	19-Dec-2019 00:00				
Compound	CAS Number LOR Unit		EM1922119-001	EM1922119-002	EM1922119-003	EM1922119-004	EM1922119-005	
				Result	Result	Result	Result	Result
EA101: Loss on Ignition								
Loss on Ignition @ 550°C		0.1	%	7.5	6.2	8.5	7.4	5.1



Analytical Results

Sub-Matrix: SOIL (Matrix: SOIL)	Client sample ID		6389184	 	 			
	C	Client sampling date / time		Client sampling date / time		19-Dec-2019 00:00	 	
Compound	CAS Number	LOR	Unit	EM1922119-006	 	 		
				Result	 	 		
EA101: Loss on Ignition								
Loss on Ignition @ 550°C		0.1	%	6.8	 	 		





				CERTIFICATE OF ANALY	'SIS					
Batch No:	19-58784			Page		Page 1 of 4	Page 1 of 4			
Replacement Report	811855			Laboratory		Scoresby Laboratory				
This report replaces Rep Client:				Address Phone		Caribbean Business Pa 03 8756 8000	rk, 22 Dalmore Drive, Sco	oresby, VIC 3179		
Client: Contact:	Douglas Partners Pty Ltd Arthur Rowling	I		Fax Contact:		03 9763 1862 Tuyen Nguyen Client Manager Tuyen.Nguyen@alsglobal.com				
Address:	231 Normanby Road SOUTH MELBOURNE V AUSTRALIA	/IC 3205								
Client Program Ref:	87084-00 Bookaar			Date Sample	d:	19-Dec-2019				
ALS Program Ref:	DOUGLAS			Date Sample	s Received:	20-Dec-2019				
PO No:	144167			Date Issued:		04-Mar-2020				
The hash (#)	below indicates methods not cove	ered by NATA acc	creditation in the performar	nce of this service .						
Analysis	Method La	aboratory	Analysis	Method	Laboratory	Analysis	Method	Laboratory		
Moisture	WA055 So	coresby	Checktest	# External laboratory as listed.	Scoresby	Flashpoint	Outsourced	Intertek		

Loss on Ignition analysis conducted at ALS Springvale. 4 Westall Rd Springvale VIC 3170. The results may be found in their Work Order: EM1922119. NATA Accredited Laboratory Number: 825.

Flashpoint analysis conducted at Intertek Testing Services (Australia) Pty Ltd. 218 Lorimer Street, Port Melbourne, Vic 3207. The results may be found in their job No. 2020-PTML-000266. NATA Accredited Laboratory Number: 890.

Please note:

Flashpoint °C

	19-12-19	BH01-0.2-0.5m is the same as #6389186	>65.0
	19-12-19	BH02-0.4-0.7m is the same as #6389188	>65.0
	19-12-19	BH03-0.0-0.2m is the same as #6389190	>65.0
	19-12-19	BH04-0.5m is the same as #6389192	>65.0
6389182	19-12-19	BH05-0.3-0.5m is the same as #6389194	>99.5
	19-12-19	BH06-0.6-0.9m is the same as #6389196	>65.0

Please note that this is an amended report replacing the one originally sent on 08/01/2020. The amendment involves amended results for flash point. The amendments were made by Tuyen Nguyen on 04/03/2020.



Signatories

Legionella species refers to Legionella species other than Legionella pneumophila Measurement Uncertainties values for your compliance results are available at this link

Name	Title	Name	Title
Brad Snibson	Client Manager	Chatura Perera	Team Leader Nutrients
Ximena Iglesias	Client Manager		

RIGHT SOLUTIONS | RIGHT PARTNER

Page: Page 2 of 4

Page:	Page 3 of 4
Batch No:	19-58784
Report Number:	811855
Client:	Douglas Partners Pty Ltd
Client Program Ref:	87084-00 Bookaar



LOR = Limit of reporting. When a reported LOR is higher than the standard LOR, this may be due to high moisture content, insufficient sample or matrix interference.

CAS Number = Chemistry Abstract Services Number. The analytical procedures in this report (including in house methods) are developed from internationally recognised procedures such as those published by USEPA, APHA and NEPM.

		Sample No.				6389176	6389178	6389180	6389182	6389184
			Client Sample ID			BH02-0.4-0.7m	BH03-0.0-0.2m	BH04-0.5m	BH05-0.3-0.5m	BH06-0.6-0.9m
				Sample Date	19/12/19	19/12/19	19/12/19	19/12/19	19/12/19	19/12/19
				Sample Type	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
Analysis	Analyte	CAS #	LOR							
Checktest	Checktest				Refer WO:EM1922119					
Analysis	Analyte	CAS #	LOR							
Moisture	Moisture %	MOISTCONTE	<2	% w/wet w	19	30	19	22	26	28
Analysis	Analyte	CAS #	LOR							
Flashpoint	Flashpoint °C	FLASHPOINT		°C	>65.0	>65.0	>65.0	>65.0	>99.5	>65.0

Samples not collected by ALS and are tested as received.

A blank space indicates no test performed. Soil microbiological testing was commenced within 4 days from the day collected unless otherwise stated.

Water microbiological testing was commenced on the day received and within 24 hours of sampling unless otherwise stated.

MM524: Plate count results <10 per mL and >300 per mL are deemed as approximate.

MM526: Plate count results <2,500 per mL and >250,000 per mL are deemed as approximate.

Calculated results are based on raw data.

Page:	Page 4 of 4
Batch No:	19-58784
Report Number:	811855
Client:	Douglas Partners Pty Ltd
Client Program Ref:	87084-00 Bookaar



QUALITY CONTROL - DUPLICATES

QC Data for duplicates is calculated on raw 'unrounded' values. Laboratory duplicates are randomly selected samples tested by the laboratory to maintain method precision and provide information on sample homogeniety.

RPD = Relative Percentage Difference for duplicate determinations. RPD's that fall outside the general acceptance criteria will be attributed to non-homogeneity of samples or results of low magnitudes.

					Sample Value	Duplicate Value	% RPD
Lab Sample ID	Client Sample ID	Analysis	Analyte				
6391608	NCP	Moisture	Moisture %	% w/wet w	20	20	0.4

Samples not collected by ALS and are tested as received.

A blank space indicates no test performed. Soil microbiological testing was commenced within 4 days from the day collected unless otherwise stated.

Water microbiological testing was commenced on the day received and within 24 hours of sampling unless otherwise stated.

MM524: Plate count results <10 per mL and >300 per mL are deemed as approximate.

MM526: Plate count results <2,500 per mL and >250,000 per mL are deemed as approximate.

Calculated results are based on raw data.

Douglas Partners

CHAIN OF CUSTODY DESPATCH SHEET

Project No: 87084.00					Suburb: Bookaar				To: ALS Scoresby					
Project Name: BOOKAAR, Meningoort Road - Peat						Order Number 144167				22 Dalmore Drive, Scoresby, Victoria 3179				
Project Manager: Arthur Rowling						Sampler: AR/WB				Attn: Tuyen Nguyen				
Emails:	r.Rowling(Phone: 03 8756 8116							
Date Required:		day 🛛	24 hours		ours 🛛	72 hou	rs 🛛	Standard	✓	Email:	<u>tuye</u>	en.nguye	n@alsc	lobal.com
Prior Storage:	🗆 Esky	🛛 Fridge			Do samp	oles contai	n 'potentia	I' HBM?	Yes 🛛	No 🗆	(If YES, the	en handle, tr	ransport ar	nd store in accordance with FPM HAZIE
		pled	Sample Type	Container Type	Analytes				~					
Sample ID	Lab ID	Date Sampled	S - soil W - water	G - glass P - plastic	Moisture Content	Loss on Ignition	Flashpoint							Notes/preservation
BH01-0.2-0.5m		19/12/19	S	G	✓	1	1							Flashpoint sample in second ja
BH01-1.2-1.5m		19/12/19	S	G										Flashpoint sample in second ja
BH02-0.4-0.7m		19/12/19	S	G	~	~	 ✓ 							Flashpoint sample in second ja
BH02-1.45-1.8m		19/12/19	S	G										Flashpoint sample in second ja
BH03-0.0-0.2m		19/12/19	S	G	~	~	 ✓ 							Flashpoint sample in second ja
BH03-1.2-1.4m		19/12/19	S	G				<u>-</u>						Flashpoint sample in second ja
BH04-0.5m		19/12/19	S	G	✓	~	 ✓ 							Flashpoint sample in second ja
BH04-1.6-1.8m		19/12/19	S	G										Flashpoint sample in second ja
BH05-0.3-0.5m		19/12/19	S	G	✓	✓	1							Flashpoint sample in second ja
BH05-1.3-1.6m		19/12/19	S	G							an the set ditted they	'NADA KAKI DAL BI		Flashpoint sample in second ja
BH06-0.6-0.9m		19/12/19	S	G	∕	✓	 ✓ 		ALS	I MA HAUMA	HUI DINNA LULU INK	 	IN KUL 	Flashpoint sample in second ja
BH06-1.4-1.7m		19/12/19	S	G							i lað Is 1	9-58784	-	Flashpoint sample in second ja
						······			M	EL-C-04 Du	ue Date: 31/	12/2019	- -, ,	
PQL (S) mg/kg												ANZEC	C PQLs	req'd for all water analytes
PQL = practical of			_		to Laborat	tory Meth	od Detect	ion Limit		l ah Re	enort/Ref	erence N		9-58784
Metals to Analys Total number of					nquished	by:	r	Transpor	ted to la		•			1 00104
Send Results to:		ouglas Part				y.		Tanapor		solatory	Jy.	Phone:		Fax:
Signed:	A					v/h>	AL	<u>ج</u>		r	Date & T			1 500-
				Received b		~/h>	AL	\$		ľ	Date & T		5/12	

.